






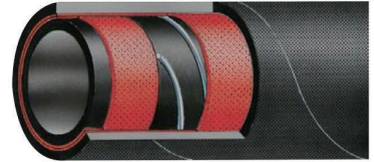


SAE100 R4

RB04

Textile Braid



TUBE : HYDRAULIC OIL RESISTANT SPECIAL NBR RUBBER.
 REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE AND STEEL WIRE HELIX.
 COVER : OIL, HEAT, ABRASION, OZONE AND WEATHER RESISTANT SPECIAL CR RUBBER.
 APPLICATION : IN OIL RETURN LINES OF HYDRAULIC SYSTEMS OF INDUSTRIAL AND AGRICULTURAL APPLICATIONS
 TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F

| TYPE | SIZE | |  ID (mm) | |  OD (mm) |  WP | |  BP | |  BR/r |  W |  L |
|------------|------|-------|---|-------|---|---|-----|--|------|---|--|--|
| | dash | inch | min | max | max | bar | psi | bar | psi | mm | g/m | max/m |
| RB04-19R4 | -12 | 3/4 | 18.2 | 19.8 | 34.9 | 21 | 305 | 84 | 1220 | 125 | 920 | 20/40 |
| RB04-25R4 | -16 | 1 | 24.6 | 26.2 | 41.3 | 17 | 247 | 68 | 988 | 150 | 1100 | 20/40 |
| RB04-32R4 | -20 | 1-1/4 | 30.6 | 33.0 | 50.8 | 14 | 203 | 56 | 812 | 200 | 1300 | 20/40 |
| RB04-38R4 | -24 | 1-1/2 | 36.9 | 39.3 | 57.2 | 10.5 | 152 | 42 | 608 | 255 | 1800 | 20/40 |
| RB04-51R4 | -32 | 2 | 49.2 | 52.4 | 69.9 | 7 | 102 | 28 | 408 | 300 | 2230 | 20/40 |
| RB04-63R4 | -40 | 2-1/2 | 61.9 | 65.1 | 82.6 | 4 | 58 | 16 | 232 | 355 | 3230 | 20/40 |
| RB04-76R4 | -48 | 3 | 74.6 | 77.8 | 95.3 | 4 | 58 | 16 | 232 | 460 | 4250 | 20 |
| RB04-89R4 | -56 | 3-1/2 | 87.3 | 90.5 | 107.9 | 3 | 44 | 12 | 176 | 530 | 5050 | 20 |
| RB04-102R4 | -64 | 4 | 100.0 | 103.2 | 120.7 | 2.5 | 36 | 10 | 144 | 610 | 5600 | 20 |


OPTIONS



MSHA

MARKING/TRANSFER TAPE, EMBOSSED OR INK JET

 **100 R4(***) (DN**mm) W.P.**BAR/**PSI *Q/****(YEAR)**

| | | | |
|-------|----------|--------|--|
| NORMS | SAE J517 | COLOUR |  BLACK |
|-------|----------|--------|--|